



Steel roller for conveyor systems with a diameter of 25 mm, M8 thread, and a length of 600 mm. Made of galvanized steel.






Logiform stainless steel tube, Ø 28 mm, wall thickness 0.7 mm



Metal joint set HJ, zinc-plated



Adjustable leveling foot, Ø30, +-50mm

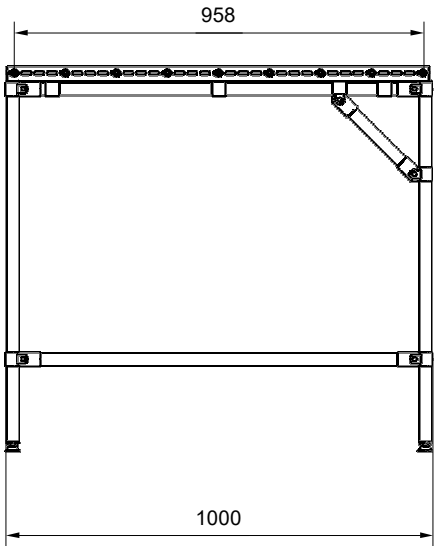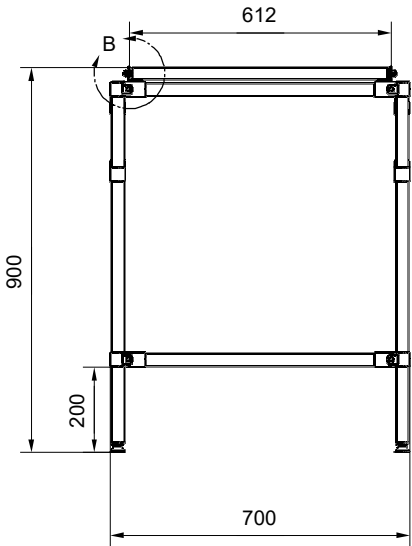

Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v						
-Machining details and finish classification to DIN ISO 1302						
	E		Total load capacity*: 100 kg (Celková nosnosť:*)			
	Scale	A3	Drawn Kempný	Checked	Dat. 02.10.2025	
	Title				Sheet 1 of 1	Rev. A00
 Enprag		Title			Doc.Nr.	
		Dopravník 4			25100230_1	

This document is the sole property of Enprag s.r.o. and may not be copied, duplicated, used or given to third parties without the written permission from Enprag s.r.o. Misuse is subject to penalties and will be legally pursued

Tolerances for shape and condition:
- DIN ISO 2768-2-K
Tolerancing:
- DIN 7167

